


DATASHEET

Rockfon® Acoustimass™

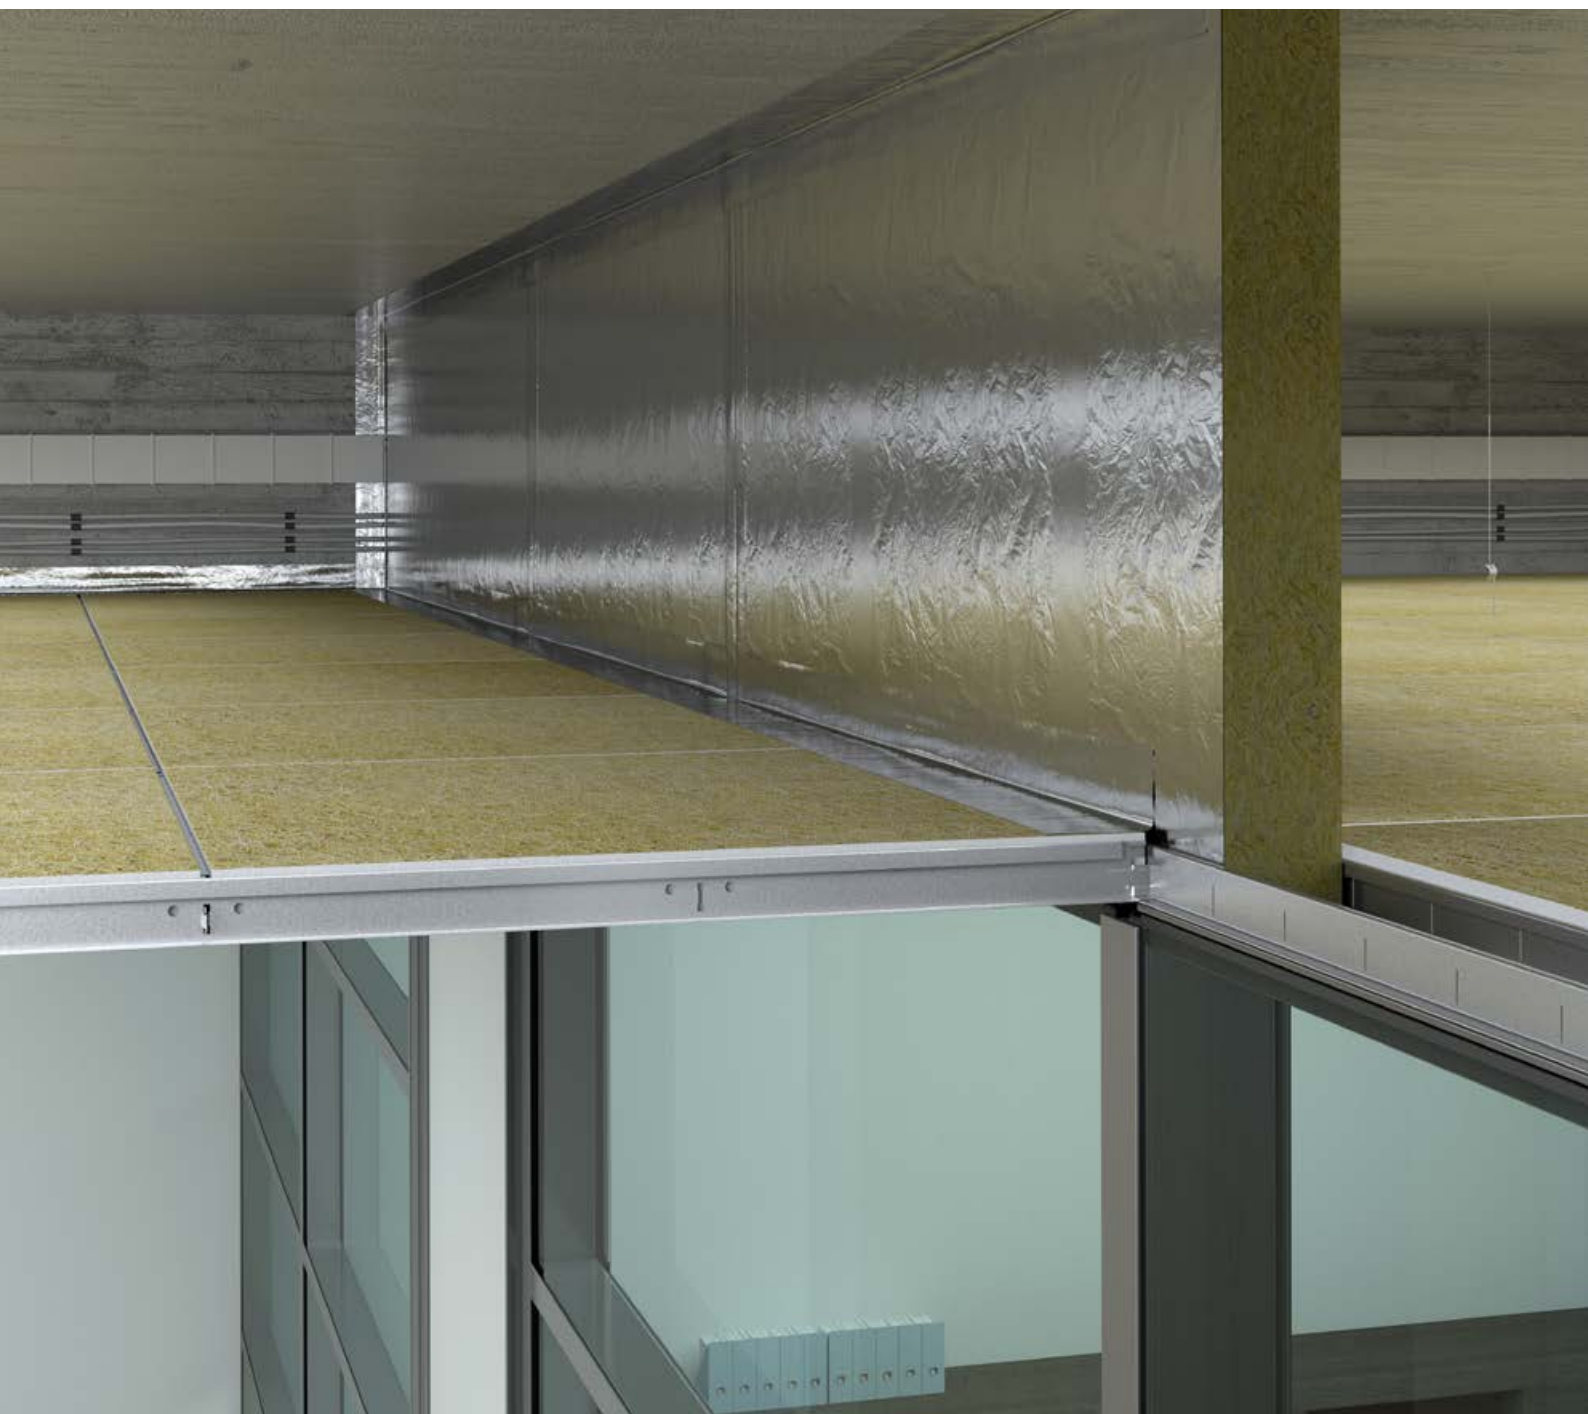

Sounds Beautiful

Rockfon® Acoustimass™

- Acoustic barriers which reduce noise transfer in ceiling and floor plenums
- Easy to install above or below modular partitions
- Excellent fire safety (Class A1)

Product Description

- Stone wool tiles
- 80mm thick with aluminium foil membrane to both sides

Application Areas

- Retail
- Education
- Healthcare
- Industry
- Office
- Leisure

	Module size (mm)	Weight (kg/m²)	A1-A3 Production stage impact (kg CO₂ eq/m²)*	A1-C4 Full life cycle impact (kg CO₂ eq/m²)*
	1200 x 600 x 80	6.4	3.47	5.19
	1200 x 1000 x 80			

Dimensions given correspond exactly to the size of the finished products.

* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/uk-epd](#). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Direct sound insulation

$R_w = 19$ dB



Room to room sound insulation

* Values obtained on the basis of theoretical analysis.

Rockfon Sonar A (20 mm)	27		47*
Rockfon Sonar dB 35	35		50*
Rockfon Sonar dB 41	41		55*
Rockfon Sonar dB 43	43		56*
Rockfon Sonar dB 46	46		58*



Reaction to fire

A2-s1,d0



Fire protection

The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes.



Humidity and sag resistance

Up to 100% RH



Hygiene

Stone wool provides no sustenance to microorganisms



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCB certification.

Sounds Beautiful



Wilhams Insulation Far East Sdn Bhd

15 & 17 Jalan Utarid U5/23

Mah Sing Integrated Industrial Park
40150 Shah Alam, Selangor, Malaysia

Tel : 603-7846 6728

E-mail : wilhams@wilhams.com.my

Website : www.wilhams.com.my

